

罐阀 2.0 技术

2.0 TECHNOLOGY FOR TANK VALVE

升级版2.0: 手柄提升杆改用铸件，无钣金件毛刺，不硌手；轴端压板螺母去掉，直接在阀体攻丝，维修时不易丢失。

Update 2.0: Operating lever made by casting, no burrs like sheet board; Tap on the valve body instead of nut (which is usually lost during maintenance) for the clamp.



法兰式蝶阀

FLANGED BUTTERFLY VALVE

基本配置 Basic Details


法兰式蝶阀 入口为 $6 \times \Phi 14\text{mm}$, 168mm PCD 法兰, 螺孔分布见图示; 出口为 $4 \times \Phi 17\text{mm}$, 146mm PCD 等分腰孔法兰。左手操作, 提供 TIR 和定位销。接触货物的零件采用 316 不锈钢制造, 带 PTFE 密封。可选项: 备用入口法兰钻孔。适用于易凝固货物的型带半球形阀板。亦可蒸汽加热。

Inlet flange drilled $6 \times 14\text{mm}$ holes spaced as shown below on a 168mm PCD; Outlet flange with 4 slots 17mm equi-spaced on a 146mm PCD. Left hand operated with TIR and padlock facility to handle. Contact parts manufactured in 316 stainless steel with PTFE seals. Alternative inlet flange drilling. "Congealing cargo" version with semi-spherical closure plate. Steam heated option.

规格 Specification


重量	Weight	7 KG
设计压力	Design Pressure (MAWP)	6.9 Bar (100 PSI)
测试压力	Test Pressure	10.35 Bar (150 PSI)
设计温度	Design Temperature	-55°C to 200°C (-67°F to 392°F)

FITTING DIMENSION

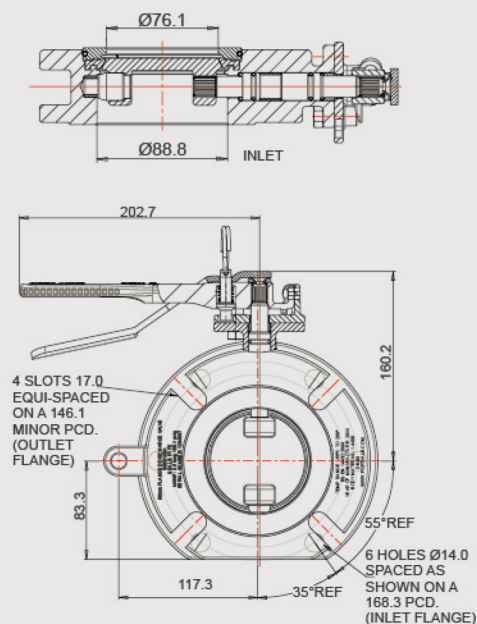

Example shown : 368-3160A

1 标准配置 Basic configuration

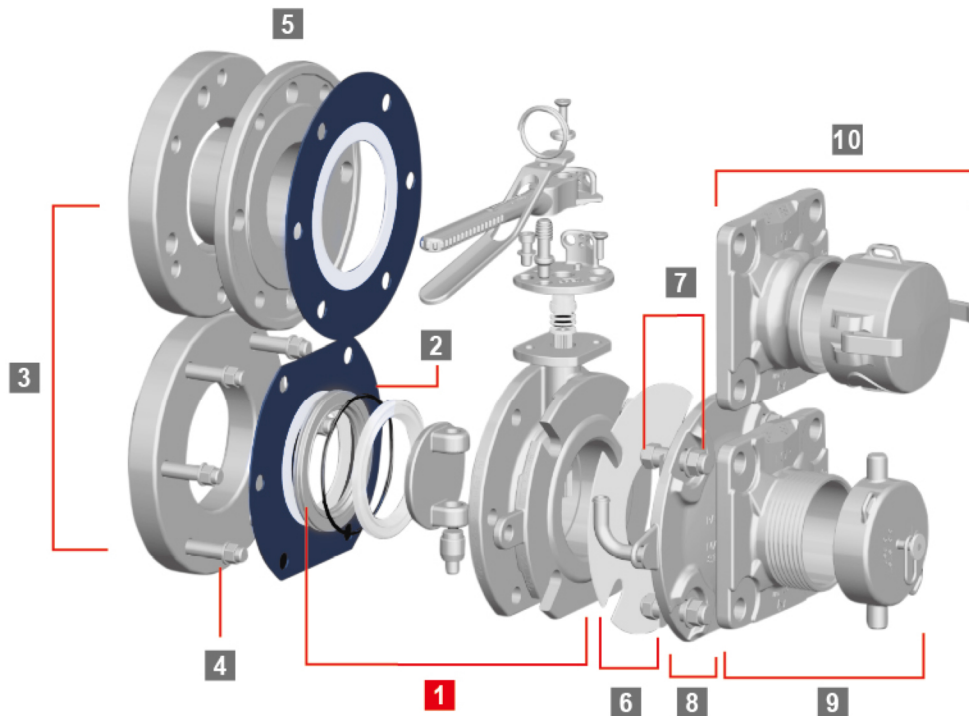


选装部件

OPTIONAL COMPONENTS

罐阀 2.0 技术 2.0 TECHNOLOGY FOR TANK VALVE

2 罐体法兰CNAF/PTFE复合垫片5005-169;	2 Combined gasket for flange;
3 常用罐体6孔法兰368-0800, 通用10孔法兰312-0045, 亦可接4孔夹持式蝶阀;	3 Multi-flange for flanged & clamped valve, 8-M16-160 PCD & 4-M16-152.4 PCD;
4 罐体法兰螺栓包312-1000;	4 Bolt kit;
5 虹吸管法兰368-0810及配套垫片5005-222;	5 Flange for siphon pipe and gasket;
6 4腰孔纯PTFE垫片5000-417;	6 PTFE Gasket with 4 slots;
7 螺栓包311-3500;	7 Bolt kit for blind flange;
8 精密铸造盲法兰312-0022CM;	8 Blind flange by casting;
9 3" BSP出口法兰368-8047及配套防尘盖10303PSI;	9 3" BSP dust cap & flange for outlet;
10 3" 快接式出口法兰368-8058及配套防尘盖90-DC300	10 Camlock outlet and flange



312/0022



176/3160



S0206



530/8053

盲法兰

Blind Flanges

盲法兰适用于 blind flange to suit	孔数 NO. Holes	孔径 (mm) Holes Φ	分布圆直径 PCD	钻孔规范 Drilling Spec	零件号 (mm) Part NO.
顶出料罐体焊接法兰 (368-0800) top discharge tank pad	6	14	168	—	S0206CM
安全阀罐体焊接法兰 (176-3150) relief valves tank pad 176-3150	6	11	105	—	176-3160CM
顶部/底部卸料阀 top/bottom discharge	4	18	160	DIN80	312-0022CM
顶部/底部卸料阀 top/bottom discharge	4	18 SLOT	146-160	DIN80/3"ASA	360-8066CM
空气阀接头 weld-flange to suit	4	18	125	DIN50 PN10	370-4239CM
空气球阀法兰 例如 530-1200 flanged air line ball valve e.g 530-1200	4	18	110	DIN50 PN10	530-8053CM



S0604



176-3166



324-9000

焊接法兰

Weld-in Flanges

盲法兰适用于 Blind flange to suit	孔数 NO. Holes	孔径 (mm) Holes Φ	分布圆直径 PCD	钻孔规范 Drilling Spec	零件号 (mm) Part NO.
法兰式安全阀-3" ASA 150 flanged Max relief valve 3" ASA 150	4	M16	152	3" ASA 150	S0604
2.5" BSP 螺纹安全阀 2.5" BSP relief valve	6	M10	105	—	176-3166
45° 底阀 45° footvalve	8	M12	178	3.5" ASA 150	324-9000



激光标识

Laser Etching

我们非常乐意将您的标识刻在贵公司订购的法兰上。
欲知详情请与我们联系

Please note Giayoung is happy to customise flanges by laser etching with your company logo. Please contact us for further details.