



罐阀 2.0 技术

2.0 TECHNOLOGY FOR TANK VALVE

升级版2.0: 手柄提升杆改用铸件，无钣金件毛刺，不硌手；轴端压板螺母去掉，直接在阀体攻丝，维修时不易丢失

Update 2.0: Operating lever made by casting, no burrs like sheet board; Tap on the valve body instead of nut (which is usually lost during maintenance) for the clamp.

夹持式蝶阀

CLAMPED BUTTERFLY VALVE

基本配置 Basic Details


3" 夹持式蝶阀 — 左手操作，提供 TIR 和定位锁。接触货物的零件采用 316 不锈钢制造，带PTFE主密封，可锁定手柄，易凝固货物可使用带半球形阀板，右手操作型，2" 和4" 系列夹持阀。TW 型阀体可选。

3" Clamped Butterfly Valve left hand operated with TIR to handle and padlock facility. Contact parts manufactured in 316 stainless steel with PTFE main seal – lockable handle. "Congealing cargo" version with semi-spherical closure plate. Right hand operated version. Range of 2" and 4" clamped valves. TW style body available.

规格 Specification


| | | |
|------|------------------------|------------------------------------|
| 重量 | Weight | 3.5 KG |
| 设计压力 | Design Pressure (MAWP) | 6 Bar (87 PSI) |
| 测试压力 | Test Pressure | 10 Bar (145 PSI) |
| 设计温度 | Design Temperature | -40°C to 200°C (-55°F to 392°F) |

FITTING DIMENSION

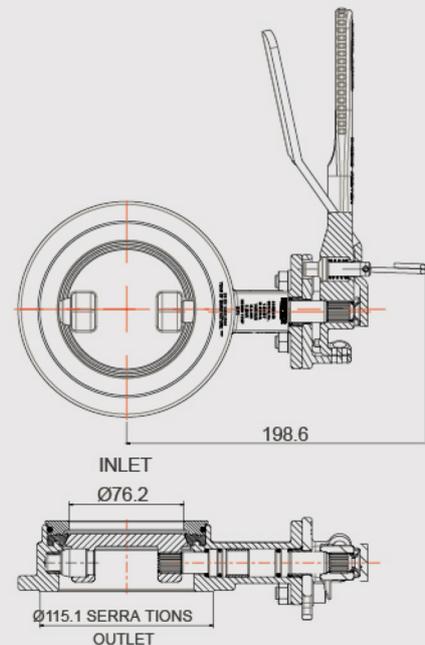

Example shown : 368-7000B

1 标准配置 Basic configuration

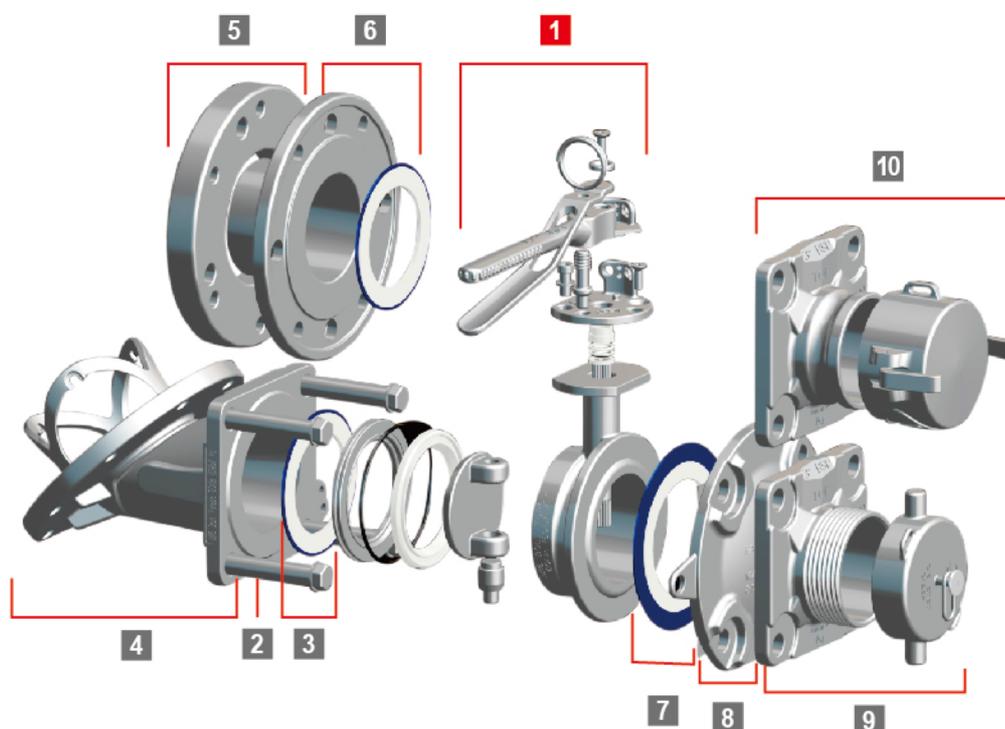

选装部件

OPTIONAL COMPONENTS

罐阀 2.0 技术
2.0 TECHNOLOGY FOR TANK VALVE

| | |
|-------------------------------------|--|
| 2 螺栓包 368-1100; | 2 Bolt kit; |
| 3 CNAF/PTFE复合入口垫片5005-049; | 3 Combined gasket for inlet; |
| 4 分体式脚阀826-1200A; | 4 Highlift footvalve; |
| 5 通用10孔法兰312-0045, 亦可接4孔夹持式蝶阀; | 5 Multi-flange for flanged & clamped valve, 8-M16-160 PCD & 4-M16-152.4 PCD; |
| 6 虹吸管法兰368-0810及配套垫片5005-222; | 6 Flange for siphon pipe and gasket; |
| 7 CNAF/PTFE复合出口垫片5005-490; | 7 Combined gasket for outlet; |
| 8 精密铸造盲法兰312-0022CM; | 8 Blind flange by casting; |
| 9 3" BSP出口法兰368-8047及配套防尘盖10303PSI; | 9 3" BSP dust cap & flange for outlet ; |
| 10 3" 快接式出口法兰368-8058及配套防尘盖90/DC300 | 10 3" camlock outlet and flange |



312/0022



176/3160



S0206



530/8053

盲法兰

Blind Flanges

| 盲法兰适用于 blind flange to suit | 孔数 NO. Holes | 孔径 (mm) Holes Φ | 分布圆直径 PCD | 钻孔规范 Drilling Spec | 零件号 (mm) Part NO. |
|--|-----------------|-------------------------|--------------|-----------------------|----------------------|
| 顶出料罐体焊接法兰 (368-0800) top discharge tank pad | 6 | 14 | 168 | — | S0206CM |
| 安全阀罐体焊接法兰 (176-3150) relief valves tank pad 176-3150 | 6 | 11 | 105 | — | 176-3160CM |
| 顶部/底部卸料阀 top/bottom discharge | 4 | 18 | 160 | DIN80 | 312-0022CM |
| 顶部/底部卸料阀 top/bottom discharge | 4 | 18 SLOT | 146-160 | DIN80/3"ASA | 360-8066CM |
| 空气阀接头 weld-flange to suit | 4 | 18 | 125 | DIN50 PN10 | 370-4239CM |
| 空气球阀法兰 例如 530-1200 flanged air line ball valve e.g 530-1200 | 4 | 18 | 110 | DIN50 PN10 | 530-8053CM |



S0604



176-3166



324-9000

焊接法兰

Weld-in Flanges

| 盲法兰适用于 Blind flange to suit | 孔数 NO. Holes | 孔径 (mm) Holes Φ | 分布圆直径 PCD | 钻孔规范 Drilling Spec | 零件号 (mm) Part NO. |
|--|-----------------|-------------------------|--------------|-----------------------|----------------------|
| 法兰式安全阀-3" ASA 150 flanged Max relief valve 3" ASA 150 | 4 | M16 | 152 | 3" ASA 150 | S0604 |
| 2.5" BSP 螺纹安全阀 2.5" BSP relief valve | 6 | M10 | 105 | — | 176-3166 |
| 45° 底阀 45° footvalve | 8 | M12 | 178 | 3.5" ASA 150 | 324-9000 |



激光标识

Laser Etching

我们非常乐意将您的标识刻在贵公司订购的法兰上。欲知详情请与我们联系

Please note Giayoung is happy to customise flanges by laser etching with your company logo. Please contact us for further details.